




SUNELEC

NO:03

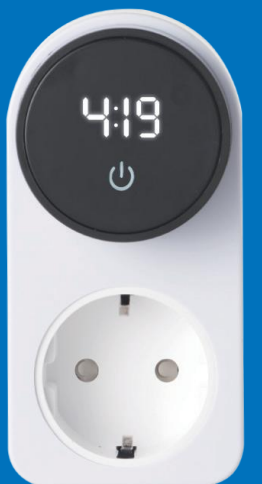

SMART HOME

宁波胜日电子有限公司
Ningbo Sunelec Co.,Ltd

厂址:宁波江北区长兴路199号6号楼4楼

Add: 4/F, Building 6, No. 199 Changxing Road, Jiangbei District, Ningbo,
China Zip: 315033

Tel: +86-574-87325996

Fax: +86-574-87325997

Mobile: +86-18805742258 Mr. Lyu

E-mail: info@sunelec.com.cn

<https://www.sungol.com>

宁波胜日电子有限公司

Ningbo Sunelec Co.,Ltd

COMPANY INTRODUCTION

公司简介

我公司系高新技术企业,位于著名的港口城市宁波,专业研发和生产智能家用产品以及家电控制线路板。

二十几年来,我们积累了丰富的研发,制造和外销经验。

好产品就是最好的销售员, 希望我们价廉物美的好产品能帮助您更好地开拓市场!

目前产品主要销往欧洲、东南亚、中东和美洲等地, 我们衷心希望能和更多的客户长期合作,共同开发被市场认可的好产品!

Our company is a high-tech enterprise located in Ningbo, a renowned port city, specializing in R&D and manufacturing smart home products and home appliance control circuit boards.

Over the past two decades, we have accumulated extensive experience in R&D, manufacturing, and international export.

A great product is the best salesperson—we hope our high-quality, cost-effective products will help you better expand your market!

Currently, our products are primarily sold to Europe, Southeast Asia, the Middle East, and the Americas. We sincerely look forward to establishing long-term partnerships with more customers and jointly developing outstanding products recognized by the market!

Main
Market



美国



德国



法国



英国



意大利



澳大利亚



巴西



南非

Certificates



目录

● Smart Socket

STS10 Smart Timer Socket

STS20 Remote Control Socket

STS40 Water-proof Socket with Remote control

STS50 Socket Thermostat

SRS-10/SRS-20/SRS-30 Smart Socket

SRS-40/SRS-50 Smart Socket with USB

● Smart Wall Switch

SWS-10/SWS-15 Smart Glass Touchable Wall Switch

SWS-11/SWS-16 Smart Wall Switch

SWS-20 Self-powered Smart Wall Switch

SWS-30 Wireless switch(work with battery)

● Smart Bulb



Smart Timer Socket



STS10

Mode	Normal - Timed - Countdown - Random
Material	Flame retardant PC/brass
Voltage Range	220-240V
Maximum Current	10A
Maximum Power	2500W



STS10-US



STS10-UK



STS10-FR



STS10-IT 10A



STS10-IT 16A



STS10-CN 10A



STS10-CN 16A




STS10-JP



STS10-BR



STS10-IL

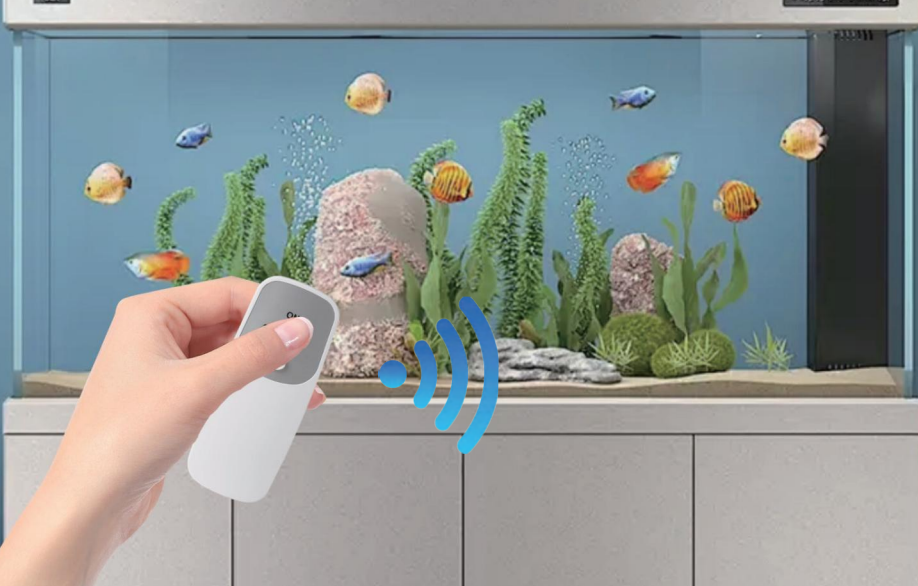


STS20

Mode	ON/OFF (With 433M Wireless Remote Control)
Material	Flame retardant PC/brass
Voltage Range	220-240V
Maximum Current	10A
Maximum Power	2500W



Water-proof Socket (with Remote control)

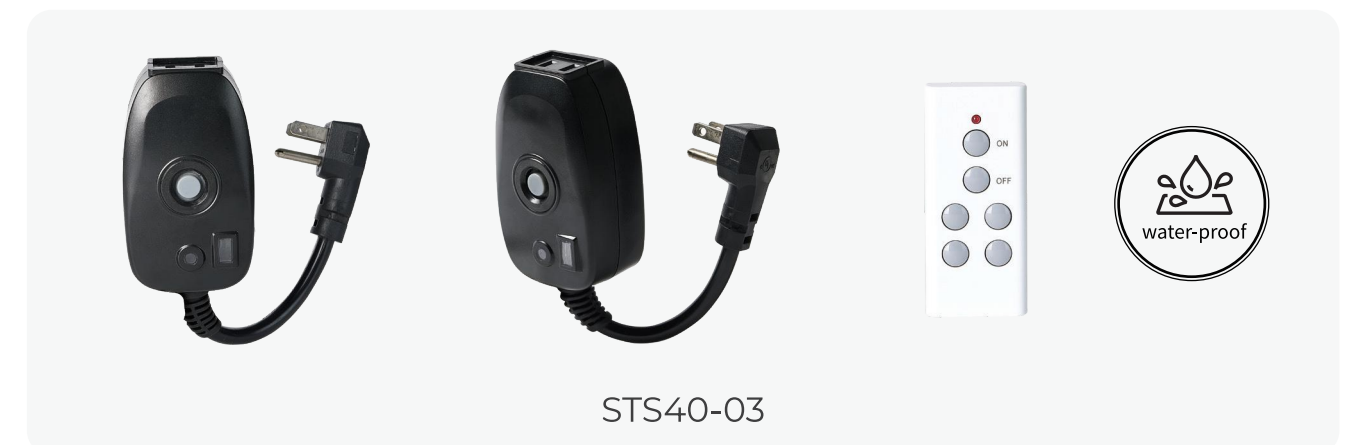

Thermostat Socket





SRS-10-RF

Current: 16A
Material: PC+ABS
Switch Type: RF433
Voltage: AC100V-240V
110V 220V 50/60Hz
Size: 90*100*60mm
Battery type: CR 2032



SRS-10-RF EU

SRS-10-W

Current: 10A/16A
Material: PC+ABS
Switch Type: APP control
Voltage: AC 100V-240V
110V 220V 50/60Hz
Working Frequency: 2.4GHz WIFI
WIFI Standard: IEEE 802.11 b/g/n
Size: 52*52*87mm



SRS-10-W EU

SRS-20-W

Current: 16A Max
Material: PC+ABS
Switch Type: APP control
Voltage: AC 100V-240V
110V 220V 50/60Hz
Working Frequency: 2.4GHz WIFI
WIFI Standard: IEEE 802.11 b/g/n
Size: 57*57*54mm



SRS-20-W UK



SRS-20-W



Current: 16A Max
Material: PC+ABS
Switch Type: APP control
Voltage: AC 100V-240V
110V 220V 50/60Hz
WIFI Standard: IEEE 802.11 b/g/n
Size: 54*54*51mm



SRS-20-W US

SRS-301

Current: 16A Max
Material: PC+ABS
Switch Type: APP control
Voltage: AC 100V-240V
110V 220V 50/60Hz
Working Frequency: 2.4GHz WIFI
WIFI Standard: IEEE 802.11 b/g/n
Size: 70*70*72mm



SRS-301-W EU

SRS-302-W



Current: 16A Max
Material: PC+ABS
Switch Type: APP control
Voltage: AC 100V-240V
110V 220V 50/60Hz
Working Frequency: 2.4GHz WIFI
WIFI Standard: IEEE 802.11 b/g/n
Size: 113x52x89mm



SRS-302-W EU

SRS-501-W



Current: 10A
Material: PC+ABS
Switch Type: APP control
Voltage: AC 100V-240V
110V 220V 50/60Hz
Working Frequency: 2.4GHz WIFI
WIFI Standard: IEEE 802.11 b/g/n
USB.TYPE-C: 5V/3A
Size: 113x52x89mm



SRS-501-W EU



SRS-501-W US



SRS-501-W BR



SRS-501-W FR



SRS-501-W IL

SRS-303-W



Current: 10A
Material: PC+ABS
Switch Type: APP control
Voltage: AC 100V-240V
110V 220V 50/60Hz
Working Frequency: 2.4GHz WIFI
WIFI Standard: IEEE 802.11 b/g/n
Size: 82x37x37mm



SRS-303-W BR



SRS-305-W



Current: 10A
Material: PC+ABS
Switch Type: APP control
Voltage: AC 100V-240V
110V 220V 50/60Hz
Working Frequency: 2.4GHz WIFI
WIFI Standard: IEEE 802.11 b/g/n
USB.TYPE-C: 5V/3A, 9V/2.22A, 12V/1.67A,
20W Max, USB PD
Size: 75*52*82mm



SRS-305-W EU

SRS-40-W



Current: 10A
Material: PC+ABS
Switch Type: APP control
Voltage: AC 100V-240V
110V 220V 50/60Hz
Working Frequency: 2.4GHz WIFI
WIFI Standard: IEEE 802.11 b/g/n
Size: 113x52x89mm



SRS-40-W EU




SRS-40-W UK




SRS-40-W US



SRS-40-W FR

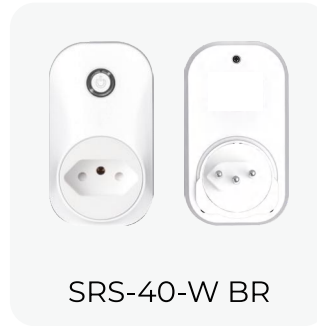

SRS-40-W BR

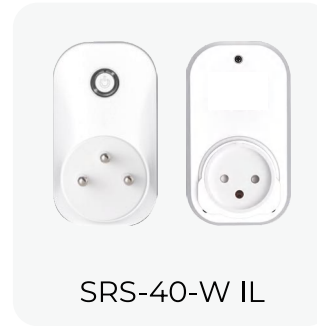

SRS-40-W IL

SRS-304-W



Current: 10A
Material: PC+ABS
Switch Type: APP control
Voltage: AC 100V-240V
110V 220V 50/60Hz
Working Frequency: 2.4GHz WIFI
WIFI Standard: IEEE 802.11 b/g/n
USB.TYPE-C: 5V/3A
Size: 100*42*66mm



SRS-304-W BR

SRS-502-W



Current: 10A
Material: PC+ABS
Switch Type: APP control
Voltage: AC 100V-240V
110V 220V 50/60Hz
Working Frequency: 2.4GHz WIFI
WIFI Standard: IEEE 802.11 b/g/n
USB.TYPE-C: 5V/2.1A
Size: 113x52x89mm



SRS-502-W EU



SRS-502-W US



SRS-502-W FR



SRS-502-W BR



SRS-502-W IL



Smart Wall Switch



Smart Glass Touchable Wall Switch

Standard:	EU/UK/FR/AU
Input voltage:	100-240VAC 50/60Hz
Current max:	10A
Power rating:	5-300W/gang
Standby power:	0.5W
Life:	100000 times
Operation Temperature:	-20~+50
Panel material:	Tempered glass
Shell material:	ABS+PC
Fireproof:	94-V0
Version:	Single live wire control
Capacitor:	add capacitor(power less than 5W)
Working Frequency:	2.4GHz 802.11b/g/n
Installation hole spacing:	60mm
App remote control:	smart life/Tuya smart
Voice support:	Work with Google home/ Amazon Alexa/ Yandex Alice
Product size:	86*86*32.8mm
Color:	Black/White/Gold



SWS-101-W B

SWS-101-W W



SWS-102-W B



SWS-102-W W



SWS-103-W B



SWS-103-W W



SWS-104-W B



SWS-104-W W



Smart Glass Touchable Wall Switch



SWS-151-W W(L+N)


Standard:	US/BR
Input voltage:	100-240VAC 50/60Hz
Current max:	10A
Power rating:	5-300W/gang
Standby power:	0.5W
Life:	100000 times
Operation Temperature:	-20~+50
Panel material:	Tempered glass
Shell material:	ABS+PC
Fireproof:	94-V0
Version:	Single live wire control
Capacitor:	add capacitor(power less than 5W)
Working Frequency:	2.4GHz 802.11b/g/n
Installation hole spacing:	60mm
App remote control:	smart life/Tuya smart
Voice support:	Work with Google home/ Amazon Alexa/ Yandex Alice
Product size:	118*72*40mm
Color:	Black/White



SWS-152-W W(L+N)



SWS-153-W W(L+N)

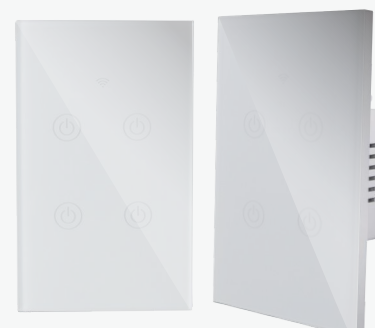

SWS-154-W W(L+N)

Smart Wall Switch

Standard:	EU/UK/FR/AU
Input voltage:	100-240VAC 50/60Hz
Current max:	10A
Power rating:	5-300W/gang
Standby power:	0.5W
Life:	100000 times
Operation Temperature:	-20~+50
Panel material:	Tempered glass
Shell material:	ABS+PC
Fireproof:	94-V0
Version:	Single live wire control
Capacitor:	add capacitor(power less than 5W)
Working Frequency:	2.4GHz 802.11b/g/n
Installation hole spacing:	60mm
App remote control:	smart life/Tuya smart
Voice support:	Work with Google home/ Amazon Alexa/Yandex Alice
Product size:	86*86*32mm
Color:	Black/White/Gold



SWS-111-W W



SWS-112-W W



SWS-113-W W



Smart Wall Switch

Standard:	US/BR
Input voltage:	100-240VAC 50/60Hz
Current max:	10A
Power rating:	5-300W/gang
Standby power:	0.5W
Life:	100000 times
Home/Operation Temperature:	-20~+50
AlicePanel material:	Tempered glass
Shell material:	ABS+PC
Fireproof:	94-V0
Version:	Single live wire control
Capacitor:	add capacitor(power less than 5W)
Working Frequency:	2.4GHz 802.11b/g/n
Installation hole spacing:	60mm
App remote control:	smart life/Tuya smart
Voice support:	Work with Google home/ Amazon Alexa/Yandex Alice
Product size:	118*70*38mm
Color:	Black/White/Gold



SWS-201-W W



SWS-202-W W



SWS-203-W W

Self-powered Smart Wall Switch

Material:	PC+ABS
Is Smart Device:	YES
Switch Type:	APP control+RF433 switch control
Controller Operating Voltage:	AC 100V-240V 50/60Hz
Controller size:	48*48*22mm
Switch panel size:	86*86*19mm
Current:	16A
Support System:	Both Android IOS
Support App:	Tuya Smart or Smart Life
Support:	Google Home Amazon Alexa ECHO
Feature 1:	timing
Feature 2:	Countdown
Feature 3:	Voice Control
Feature 4:	3 Kinds Of Restart State
Feature 5:	The switch panel does not need wiring or batteries




SWS-161-WW(L+N)



SWS-162-WW(L+N)



SWS-163-WW(L+N)

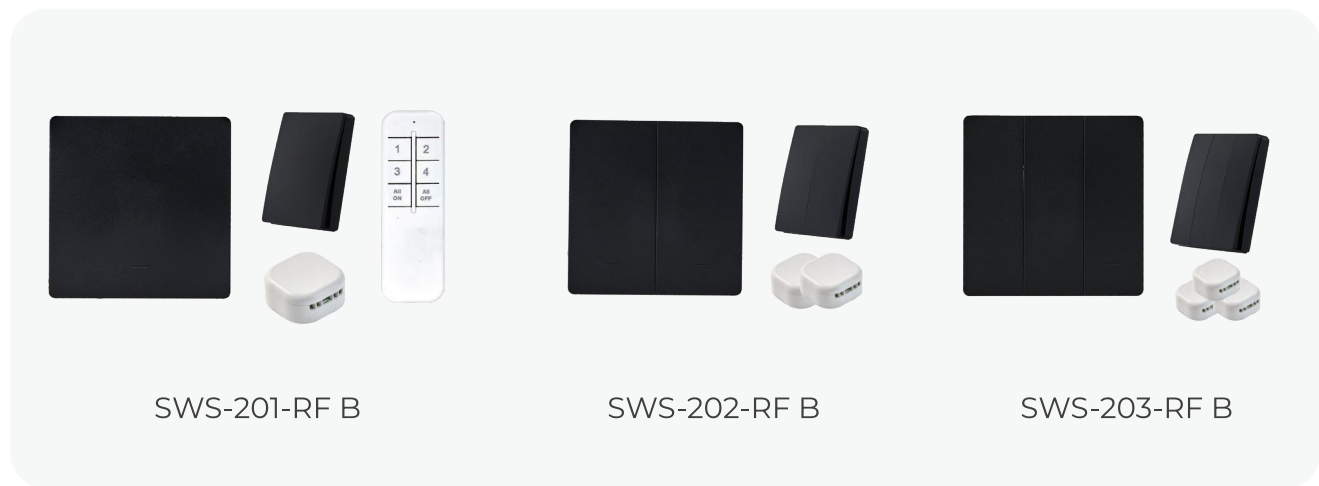


SWS-11/SWS-1

Current: 16A
Material: PC+ABS
Switch Type: RF433 switch control
Controller Operating Voltage: AC 100V-240V 50/60Hz
Switch panel size: 86*86*19mm



Wireless switch(work with battery)

Current: 10A
Material: PC+ABS
Switch Type: APP control+RF433 switch control
Controller Operating Voltage: AC 100V-240V 50/60Hz
Working Frequency: 2.4GHz WIFI+RF433
Controller WIFI Standard: IEEE 802.11 b/g/n+RF433
Controller size: 46*46*21mm
Switch panel size: 86*86*20mm
Support System: Both Android IOS
Support App: Tuya Smart or Smart Life
Support: Google Home Amazon Alexa ECHO
Feature 1: timing
Feature 2: Countdown
Feature 3: Voice Control
Feature 4: 3 Kinds Of Restart State

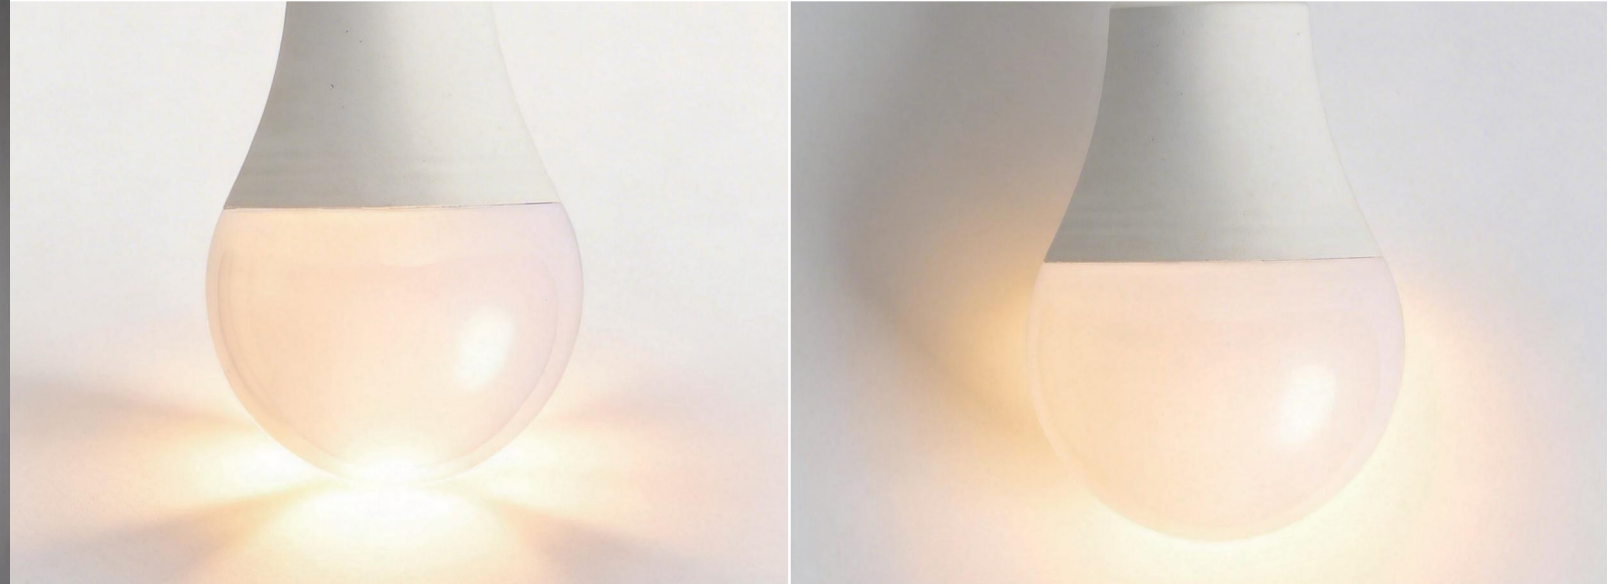

SLH-201



Communication: Bluetooth+WiFi
Lamp Holder: E26/E27
Voltage: 85-265VAC
Power: 9W 800LM Ra:80
Color Temperature: 2700-6500K
Color: RGB RGB+C+W
Size: 60*118mm



SLH-201

SLH-202

Communication: Bluetooth
Lamp Holder: E26/E27
Voltage: 85-265VAC
Power: 10W 1000LM Ra:80
Color Temperature: 2700-6500K
Color: RGB RGB+C+W
Size: 60*118mm



SLH-202